

SLIDES

FRONT & REAR MOUNT SLIDES



These 3-section ball bearing steel slides have full extension with quick disconnect function. They will fit into 1RU space, and can handle a full load rating of 100 lbs. per pair. A set of 4 mounting brackets and screws (16 of the 8-32 thread) are included. Standard finish is electro zinc plated. Other travel lengths and finish also available.

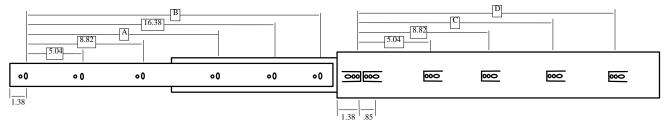




Travel Length	STOCK	NSIONS 1ch)		Shipping Weight		
Lengen	No.	A	В	С	D	weight
20	70-20Z	12.60	17.40	16.38	-	5.0
22	70-22Z	-	19.37	13.86	17.64	5.5
24	70-24Z	-	21.34	13.86	18.90	6.0
26	70-26Z	-	23.31	13.86	21.42	6.5
28	70-28Z	12.60	25.28	13.86	21.42	7.0



Slide and bracket front view

FRONT MOUNT SLIDES


Instead of above front and rear mounting brackets, this slide assembly mounts on the front rail only. Standard finish is electro zinc plated or painted. A complete assembly includes a pair of side support brackets and 2 ball bearing slides (as shown above). Other travel lengths and finish also available.

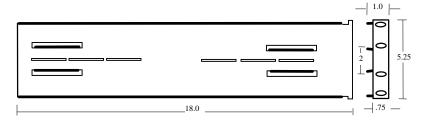

Travel Length	STOCK		Shipping Weight			
Longen	No.	А	В	C	D	weight
20	71-20G	12.60	17.40	16.38	-	8.0
22	71-22G	-	19.37	13.86	17.64	8.5
24	71-24G	-	21.34	13.86	18.90	9.0
26	71-26G	-	23.31	13.86	21.42	9.5
28	71-28G	12.60	25.28	13.86	21.42	10.0

* refer to the drawing on top of page (ball bearing slides)

- 19 -Low Cost



front view